



## Main

Range of Product	Harmony 9001K Harmony 9001SK
Product or Component Type	Light block
Device short name	9001K
Bulb base	BA 9s
Light block supply	Direct via integral resistance

## Complementary

Net Weight	0.11 lb(US) (0.05 kg)
Light source	Incandescent bulb
[Us] rated supply voltage	24 V AC/DC
[Us] rated supply voltage	24...28 V
Light block supply	Full voltage
Size	30 mm

## Environment

Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
IP degree of protection	IP20 IEC 60529
Standards	IEC 60947-5-4 JIS C 852 UL 508 IEC 60947-1 CSA C22.2 No 14 JIS C 4520 IEC 60947-5-1
Product Certifications	NEMA[RETURN]UL 508
Electrical shock protection class	Class II IEC 61140
Vibration resistance	7 gn 2...500 Hz)IEC 60068-2-6
Shock resistance	50 gn IEC 60068-2-27

## Ordering and shipping details

Category	21435-9001 KM LIGHT MODULES
Discount Schedule	CS1
GTIN	785901726524
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.20 in (5.588 cm)
Package 1 Width	3.60 in (9.144 cm)
Package 1 Length	1.90 in (4.826 cm)
Package 1 Weight	2.24 oz (63.503 g)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


## Contractual warranty

Warranty	18 months
----------	-----------

---

Dimensions

---

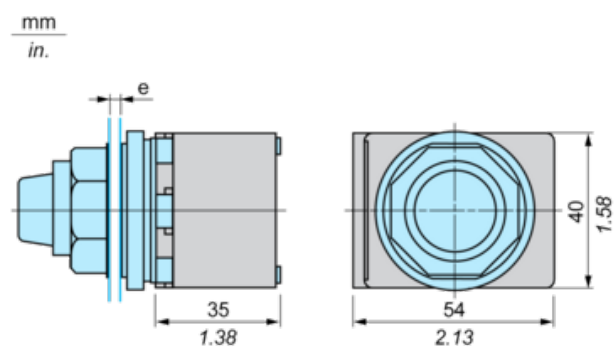

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.