

power contactor, AC-3 50 A, 22 kW / 400 V 2 NO + 2 NC, 24 V AC, 50 Hz, 3-pole, Size S2, screw terminal



|  |                 |
|--|-----------------|
| product brand name   | SIRIUS          |
| product designation  | Power contactor |
| product type designation   | 3RT2            |
| General technical data   |                 |
| size of contactor  | S2              |
| product extension  |                 |
| • function module for communication  | No              |
| • auxiliary switch   | No              |
| power loss [W] for rated value of the current                                    |                 |
| • at AC in hot operating state   | 12 W            |
| • at AC in hot operating state per pole  | 4 W             |
| power loss [W] for rated value of the current without load current share typical | 16 W            |
| surge voltage resistance   |                 |
| • of main circuit rated value  | 6 kV            |
| • of auxiliary circuit rated value   | 6 kV            |
| maximum permissible voltage for safe isolation                                   |                 |
| • between coil and main contacts acc. to EN 60947-1                              | 400 V           |

|   |                             |
|---|-----------------------------|
| <b>protection class IP</b>  |                             |
| • on the front  | IP20                        |
| • of the terminal   | IP00                        |
| <b>shock resistance at rectangular impulse</b>                                      |                             |
| • at AC   | 9.8g / 5 ms, 6.5g / 10 ms   |
| <b>shock resistance with sine pulse</b>   |                             |
| • at AC   | 15.3g / 5 ms, 10.1g / 10 ms |
| <b>mechanical service life (switching cycles)</b>                                   |                             |
| • of contactor typical  | 10 000 000                  |
| • of the contactor with added electronics-compatible auxiliary switch block typical | 5 000 000                   |
| • of the contactor with added auxiliary switch block typical                        | 10 000 000                  |
| <b>reference code acc. to DIN EN 81346-2</b>  | Q                           |

|   |                |
|---|----------------|
| <b>Ambient conditions</b>                                 |                |
| • installation altitude at height above sea level maximum | 2 000 m        |
| <b>ambient temperature</b>                                |                |
| • during operation  | -25 ... +60 °C |
| • during storage  | -55 ... +80 °C |

|   |        |
|---|--------|
| <b>Main circuit</b>   |        |
| <b>number of poles for main current circuit</b>                     | 3      |
| <b>number of NO contacts for main contacts</b>                      | 3      |
| <b>operating voltage</b>  |        |
| • at AC-3 rated value maximum                                       | 690 V  |
| <b>operating current</b>  |        |
| • at AC-1 at 400 V<br>— at ambient temperature 40 °C rated value    | 70 A   |
| • at AC-1<br>— up to 690 V at ambient temperature 40 °C rated value | 70 A   |
| — up to 690 V at ambient temperature 60 °C rated value              | 60 A   |
| • at AC-3<br>— at 400 V rated value                                 | 51 A   |
| — at 500 V rated value  | 51 A   |
| — at 690 V rated value  | 24 A   |
| • at AC-4 at 400 V rated value                                      | 41 A   |
| • at AC-5a up to 690 V rated value                                  | 61.6 A |
| • at AC-5b up to 400 V rated value                                  | 41.5 A |
| • at AC-6a  |        |

|  |                    |
|--|--------------------|
| — up to 230 V for current peak value n=20 rated value                | 43.2 A             |
| — up to 400 V for current peak value n=20 rated value                | 43.2 A             |
| — up to 500 V for current peak value n=20 rated value                | 43.2 A             |
| — up to 690 V for current peak value n=20 rated value                | 24 A               |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=30 rated value                | 28.8 A             |
| — up to 400 V for current peak value n=30 rated value                | 28.8 A             |
| — up to 500 V for current peak value n=30 rated value                | 28.8 A             |
| — up to 690 V for current peak value n=30 rated value                | 24 A               |
| <b>minimum cross-section in main circuit</b>                         |                    |
| • at maximum AC-1 rated value  | 25 mm <sup>2</sup> |
| <b>operating current for approx. 200000 operating cycles at AC-4</b> |                    |
| • at 400 V rated value   | 24 A               |
| • at 690 V rated value   | 20 A               |
| <b>operating current</b>   |                    |
| • at 1 current path at DC-1  |                    |
| — at 24 V rated value  | 55 A               |
| — at 110 V rated value   | 4.5 A              |
| — at 220 V rated value   | 1 A                |
| — at 440 V rated value   | 0.4 A              |
| — at 600 V rated value   | 0.25 A             |
| • with 2 current paths in series at DC-1                             |                    |
| — at 24 V rated value  | 55 A               |
| — at 110 V rated value   | 45 A               |
| — at 220 V rated value   | 5 A                |
| — at 440 V rated value   | 1 A                |
| — at 600 V rated value   | 0.8 A              |
| • with 3 current paths in series at DC-1                             |                    |
| — at 24 V rated value  | 55 A               |
| — at 110 V rated value   | 55 A               |
| — at 220 V rated value   | 45 A               |
| — at 440 V rated value   | 2.9 A              |
| — at 600 V rated value   | 1.4 A              |
| <b>operating current</b>   |                    |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>• with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul> | 35 A<br>2.5 A<br>1 A<br>0.1 A<br>0.06 A<br><br>55 A<br>25 A<br>5 A<br>0.27 A<br>0.16 A<br><br>55 A<br>55 A<br>25 A<br>0.6 A<br>0.35 A |
| <b>operating power</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC-2 at 400 V rated value</li> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul>  | 22 kW<br><br>15 kW<br>22 kW<br>30 kW<br>22 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>   |   |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> <li>• at 690 V rated value</li> </ul>   | 12.6 kW<br>18.2 kW  |
| <b>operating apparent output at AC-6a</b>  |   |
| <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=20 rated value</li> <li>• up to 400 V for current peak value n=20 rated value</li> <li>• up to 500 V for current peak value n=20 rated value</li> <li>• up to 690 V for current peak value n=20 rated value</li> </ul>   | 17.2 kV·A<br>29.9 kV·A<br>37.4 kV·A<br>28.6 kV·A  |
| <b>operating apparent output at AC-6a</b>  |   |
| <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> <li>• up to 400 V for current peak value n=30 rated value</li> </ul>   | 11.4 kV·A<br>19.9 kV·A  |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• up to 500 V for current peak value n=30 rated value</li> <li>• up to 690 V for current peak value n=30 rated value</li> </ul>  | 24.9 kV·A<br><br>28.6 kV·A  |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> <li>• limited to 5 s switching at zero current maximum</li> <li>• limited to 10 s switching at zero current maximum</li> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 937 A; Use minimum cross-section acc. to AC-1 rated value<br><br>697 A; Use minimum cross-section acc. to AC-1 rated value<br><br>468 A; Use minimum cross-section acc. to AC-1 rated value<br><br>282 A; Use minimum cross-section acc. to AC-1 rated value<br><br>229 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>• at AC</li> </ul>  | 5 000 1/h   |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-4 maximum</li> </ul>   | 1 000 1/h<br>600 1/h<br>800 1/h<br>250 1/h  |

| Control circuit/ Control   |              |
|--|--------------|
| <b>type of voltage of the control supply voltage</b>   | AC           |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>                                       | 24 V         |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul> | 0.8 ... 1.1  |
| <b>apparent pick-up power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                    | 190 V·A      |
| <b>inductive power factor with closing power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                          | 0.72         |
| <b>apparent holding power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                    | 16 V·A       |
| <b>inductive power factor with the holding power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                      | 0.37         |
| <b>closing delay</b> <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 10 ... 80 ms |
| <b>opening delay</b> <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 10 ... 18 ms |

|   |   |
|---|---|
| arcing time   | 10 ... 20 ms                                    |
| control version of the switch operating mechanism       | Standard A1 - A2                                |
| <b>Auxiliary circuit</b>                                |   |
| <b>number of NC contacts for auxiliary contacts</b>     |   |
| • instantaneous contact                                 | 2   |
| <b>number of NO contacts for auxiliary contacts</b>     |   |
| • instantaneous contact                                 | 2   |
| operating current at AC-12 maximum                      | 10 A  |
| <b>operating current at AC-15</b>                       |   |
| • at 230 V rated value                                  | 6 A   |
| • at 400 V rated value                                  | 3 A   |
| • at 500 V rated value                                  | 2 A   |
| • at 690 V rated value                                  | 1 A   |
| <b>operating current at DC-12</b>                       |   |
| • at 24 V rated value                                   | 10 A  |
| • at 48 V rated value                                   | 6 A   |
| • at 60 V rated value                                   | 6 A   |
| • at 110 V rated value                                  | 3 A   |
| • at 125 V rated value                                  | 2 A   |
| • at 220 V rated value                                  | 1 A   |
| • at 600 V rated value                                  | 0.15 A  |
| <b>operating current at DC-13</b>                       |   |
| • at 24 V rated value                                   | 6 A   |
| • at 48 V rated value                                   | 2 A   |
| • at 60 V rated value                                   | 2 A   |
| • at 110 V rated value                                  | 1 A   |
| • at 125 V rated value                                  | 0.9 A   |
| • at 220 V rated value                                  | 0.3 A   |
| • at 600 V rated value                                  | 0.1 A   |
| <b>contact reliability of auxiliary contacts</b>        | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>UL/CSA ratings</b>                                   |   |
| <b>full-load current (FLA) for three-phase AC motor</b> |   |
| • at 480 V rated value                                  | 52 A  |
| • at 600 V rated value                                  | 52 A  |
| <b>yielded mechanical performance [hp]</b>              |   |
| • for single-phase AC motor                             |   |
| — at 110/120 V rated value                              | 3 hp  |
| — at 230 V rated value                                  | 10 hp   |
| • for three-phase AC motor                              |   |
| — at 200/208 V rated value                              | 15 hp   |
| — at 220/230 V rated value                              | 15 hp   |

|   |             |
|---|-------------|
| — at 460/480 V rated value                                  | 40 hp       |
| — at 575/600 V rated value                                  | 50 hp       |
| <b>contact rating of auxiliary contacts according to UL</b> | A600 / Q600 |

## Short-circuit protection

|   |  |
|---|--|
| <b>design of the fuse link</b>  |  |
| <ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit           <ul style="list-style-type: none"> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> </ul> </li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> | <p>gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)</p> <p>gG: 80 A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)</p> <p>gG: 10 A (500 V, 1 kA)</p> |

## Installation/ mounting/ dimensions

|   |   |
|---|---|
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface        |
| <b>mounting type</b>  | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715  |
| <ul style="list-style-type: none"> <li>side-by-side mounting</li> </ul>   | Yes   |
| <b>height</b>   | 114 mm  |
| <b>width</b>  | 55 mm   |
| <b>depth</b>  | 174 mm  |
| <b>required spacing</b>   |   |
| <ul style="list-style-type: none"> <li>with side-by-side mounting           <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts           <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul> </li> <li>for live parts           <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul> | <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>0 mm</p> <p>10 mm</p> <p>10 mm</p> <p>6 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>6 mm</p> |

## Connections/ Terminals

|   |   |
|---|---|
| <b>type of electrical connection</b>  |   |
| <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> </ul> | <p>screw-type terminals</p> <p>screw-type terminals</p> |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>  | Screw-type terminals<br>Screw-type terminals   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul>   | 2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )<br>2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )<br>2x (18 ... 2), 1x (18 ... 1)                 |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• finely stranded with core end processing</li> </ul>  | 1 ... 35 mm <sup>2</sup>   |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• single or multi-stranded</li> <li>• finely stranded with core end processing</li> </ul>   | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <ul style="list-style-type: none"> <li>• type of connectable conductor cross-sections for auxiliary contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• type of connectable conductor cross-sections at AWG conductors for auxiliary contacts</li> </ul> | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14) |
| <b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>   | 18 ... 1<br>20 ... 14  |

#### Safety related data

|   |  |
|---|--|
| <b>B10 value</b> <ul style="list-style-type: none"> <li>• with high demand rate acc. to SN 31920</li> </ul>   | 1 000 000  |
| <b>proportion of dangerous failures</b> <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> <li>• with high demand rate acc. to SN 31920</li> </ul> | 40 %<br>73 %   |
| <b>failure rate [FIT]</b> <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> </ul>   | 100 FIT  |
| <b>product function</b> <ul style="list-style-type: none"> <li>• mirror contact acc. to IEC 60947-4-1</li> <li>• positively driven operation acc. to IEC 60947-5-1</li> </ul>       | Yes<br>No  |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>   | 20 y   |
| <b>protection against electrical shock</b>  | finger-safe when touched vertically from front acc. to IEC 60529 |
| suitability for use safety-related switching OFF  | Yes  |

#### Certificates/ approvals



| General Product Approval | EMC |
|--------------------------|-----|
|--------------------------|-----|



[KC](#)



| Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------------------|---------------------------|-------------------|-------------------|
|---------------------------------------|---------------------------|-------------------|-------------------|

[Type Examination Certificate](#)



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



| Marine / Shipping |
|-------------------|
|-------------------|



| other |
|-------|
|-------|

[Confirmation](#)

| Further information |
|---------------------|
|---------------------|

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2036-1AB04>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2036-1AB04>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-1AB04>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2036-1AB04&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2036-1AB04&lang=en)

**Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-1AB04/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2036-1AB04&objecttype=14&gridview=view1>

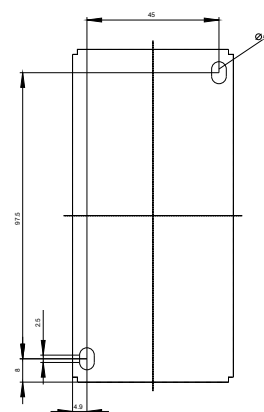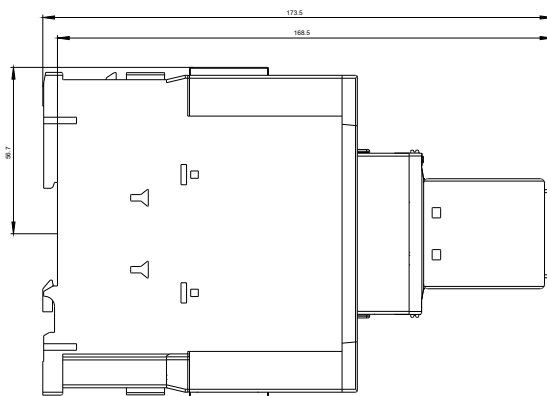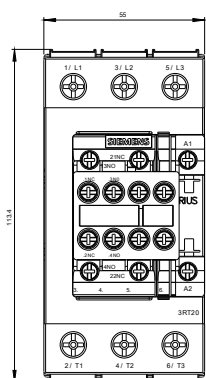



last modified:

09/24/2020