



Power contactor, AC-3 500 A, 250 kW / 400 V AC (50-60 Hz) / DC 110-127 V UC Auxiliary contacts 2 NO + 2 NC 3-pole, size S12 Busbar connections Operating mechanism: conventional Spring-type terminals

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1
General technical data	
size of contactor	S12
product extension	
• function module for communication	No
• auxiliary switch	Yes
power loss [W] for rated value of the current at AC in hot operating state	165 W
• per pole	55 W
power loss [W] for rated value of the current without load current share typical	10 W
surge voltage resistance	
• of main circuit rated value	8 kV
• of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronically optimized auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	01.05.2012 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage at AC-3 rated value maximum	1 000 V
operational current	
<ul style="list-style-type: none"> • at AC-1 at 400 V at ambient temperature 40 °C rated value 	610 A
<ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value 	610 A
<ul style="list-style-type: none"> — up to 690 V at ambient temperature 60 °C rated value 	550 A
<ul style="list-style-type: none"> — up to 1000 V at ambient temperature 40 °C rated value 	200 A
<ul style="list-style-type: none"> — up to 1000 V at ambient temperature 60 °C rated value 	200 A
<ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value 	500 A
<ul style="list-style-type: none"> — at 500 V rated value 	500 A
<ul style="list-style-type: none"> — at 690 V rated value 	450 A
<ul style="list-style-type: none"> — at 1000 V rated value 	180 A
<ul style="list-style-type: none"> • at AC-4 at 400 V rated value 	430 A
<ul style="list-style-type: none"> • at AC-5a up to 690 V rated value 	536 A
<ul style="list-style-type: none"> • at AC-5b up to 400 V rated value 	415 A
<ul style="list-style-type: none"> • at AC-6a <ul style="list-style-type: none"> — up to 230 V for current peak value n=20 rated value 	414 A
<ul style="list-style-type: none"> — up to 400 V for current peak value n=20 rated value 	414 A
<ul style="list-style-type: none"> — up to 500 V for current peak value n=20 rated value 	414 A
<ul style="list-style-type: none"> — up to 690 V for current peak value n=20 rated value 	414 A
<ul style="list-style-type: none"> — up to 1000 V for current peak value n=20 rated value 	180 A
<ul style="list-style-type: none"> • at AC-6a <ul style="list-style-type: none"> — up to 230 V for current peak value n=30 rated value 	276 A
<ul style="list-style-type: none"> — up to 400 V for current peak value n=30 rated value 	276 A
<ul style="list-style-type: none"> — up to 500 V for current peak value n=30 rated value 	276 A
<ul style="list-style-type: none"> — up to 690 V for current peak value n=30 rated value 	276 A
<ul style="list-style-type: none"> — up to 1000 V for current peak value n=30 rated value 	180 A
minimum cross-section in main circuit at maximum AC-1 rated value	370 mm ²
operational current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> • at 400 V rated value 	175 A
<ul style="list-style-type: none"> • at 690 V rated value 	150 A
operational current	
<ul style="list-style-type: none"> • at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value 	400 A
<ul style="list-style-type: none"> — at 110 V rated value 	33 A
<ul style="list-style-type: none"> — at 220 V rated value 	3.8 A
<ul style="list-style-type: none"> — at 440 V rated value 	0.9 A
<ul style="list-style-type: none"> — at 600 V rated value 	0.6 A
<ul style="list-style-type: none"> • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value 	400 A
<ul style="list-style-type: none"> — at 110 V rated value 	400 A
<ul style="list-style-type: none"> — at 220 V rated value 	400 A
<ul style="list-style-type: none"> — at 440 V rated value 	4 A

<ul style="list-style-type: none"> — at 600 V rated value • with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value 	2 A 400 A 400 A 400 A 11 A 5.2 A
operational current <ul style="list-style-type: none"> • at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value 	400 A 3 A 0.6 A 0.18 A 0.125 A 400 A 400 A 2.5 A 0.65 A 0.37 A 400 A 400 A 400 A 1.4 A 0.75 A
operating power <ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value 	160 kW 250 kW 315 kW 400 kW 250 kW
operating power for approx. 200000 operating cycles at AC-4 <ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value 	98 kW 148 kW
operating apparent power at AC-6a <ul style="list-style-type: none"> • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 1000 V for current peak value n=20 rated value 	160 000 kV·A 280 000 V·A 350 000 V·A 490 000 V·A 310 000 V·A
operating apparent power at AC-6a <ul style="list-style-type: none"> • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 1000 V for current peak value n=30 rated value 	110 000 V·A 190 000 V·A 230 000 V·A 330 000 V·A 310 000 V·A
short-time withstand current in cold operating state up to 40 °C <ul style="list-style-type: none"> • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum 	7 484 A; Use minimum cross-section acc. to AC-1 rated value 7 484 A; Use minimum cross-section acc. to AC-1 rated value 5 978 A; Use minimum cross-section acc. to AC-1 rated value 3 765 A; Use minimum cross-section acc. to AC-1 rated value 2 887 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	

<ul style="list-style-type: none"> • at AC • at DC 	2 000 1/h 2 000 1/h
operating frequency <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum 	500 1/h 170 1/h 420 1/h 130 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value 	110 ... 127 V 110 ... 127 V
control supply voltage at DC <ul style="list-style-type: none"> • rated value 	110 ... 127 V
operating range factor control supply voltage rated value of magnet coil at DC <ul style="list-style-type: none"> • initial value • full-scale value 	0.8 1.1
operating range factor control supply voltage rated value of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	0.8 ... 1.1 0.8 ... 1.1
design of the surge suppressor	with varistor
apparent pick-up power of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	830 V·A 830 V·A
inductive power factor with closing power of the coil <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	0.9 0.9
apparent holding power of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	9.2 V·A 9.2 V·A
inductive power factor with the holding power of the coil <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	0.9 0.9
closing power of magnet coil at DC	920 W
holding power of magnet coil at DC	10 W
closing delay <ul style="list-style-type: none"> • at AC • at DC 	45 ... 100 ms 45 ... 100 ms
opening delay <ul style="list-style-type: none"> • at AC • at DC 	60 ... 100 ms 60 ... 100 ms
arcing time	10 ... 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15 <ul style="list-style-type: none"> • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value 	6 A 3 A 2 A 1 A
operational current at DC-12 <ul style="list-style-type: none"> • at 24 V rated value 	10 A

<ul style="list-style-type: none"> • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value 	6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at DC-13 <ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value 	10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor <ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value 	477 A 472 A
yielded mechanical performance [hp] <ul style="list-style-type: none"> • for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value 	150 hp 200 hp 400 hp 500 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required 	gG: 630 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 500 A (690 V, 50 kA), BS88: 500 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method <ul style="list-style-type: none"> • side-by-side mounting 	screw fixing Yes
height	214 mm
width	160 mm
depth	225 mm
required spacing <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side 	20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm

Connections/ Terminals		
width of connection bar	25 mm	
thickness of connection bar	6 mm	
diameter of holes	11 mm	
number of holes	1	
type of electrical connection <ul style="list-style-type: none">• for main current circuit• for auxiliary and control circuit• at contactor for auxiliary contacts• of magnet coil	Connection bar spring-loaded terminals Spring-type terminals Spring-type terminals	
type of connectable conductor cross-sections <ul style="list-style-type: none">• at AWG cables for main contacts	2/0 ... 500 kcmil	
connectable conductor cross-section for main contacts <ul style="list-style-type: none">• stranded	70 ... 240 mm²	
connectable conductor cross-section for auxiliary contacts <ul style="list-style-type: none">• solid or stranded• finely stranded with core end processing• finely stranded without core end processing	0.25 ... 2.5 mm² 0.25 ... 1.5 mm² 0.25 ... 2.5 mm²	
type of connectable conductor cross-sections <ul style="list-style-type: none">• for auxiliary contacts<ul style="list-style-type: none">— solid— solid or stranded— finely stranded with core end processing— finely stranded without core end processing• at AWG cables for auxiliary contacts	2x (0.25 ... 2.5 mm²) 2x (0,25 ... 2,5 mm²) 2x (0.25 ... 1.5 mm²) 2x (0.25 ... 2.5 mm²) 2x (24 ... 14)	
AWG number as coded connectable conductor cross section <ul style="list-style-type: none">• for auxiliary contacts	24 ... 14	
Safety related data		
product function mirror contact acc. to IEC 60947-4-1	Yes	
B10 value with high demand rate acc. to SN 31920	1 000 000	
product function positively driven operation acc. to IEC 60947-5-1	No	
protection class IP on the front acc. to IEC 60529	IP00; IP20 with box terminal/cover	
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover	
suitability for use <ul style="list-style-type: none">• safety-related switching on• safety-related switching OFF	Yes Yes	
Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity



Declaration of Conformity	Test Certificates	Marine / Shipping	other
---------------------------	-------------------	-------------------	-------

[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



[Miscellaneous](#)

[Confirmation](#)[Miscellaneous](#)[Confirmation](#)[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1076-2AF36>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1076-2AF36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1076-2AF36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1076-2AF36&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1076-2AF36/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1076-2AF36&objecttype=14&gridview=view1>

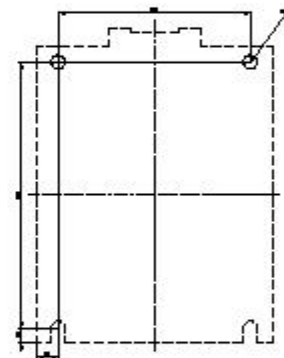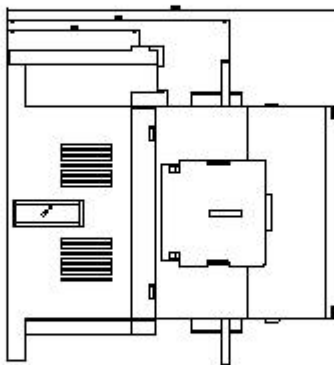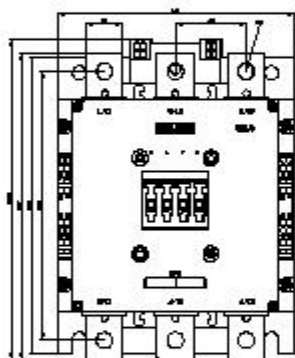

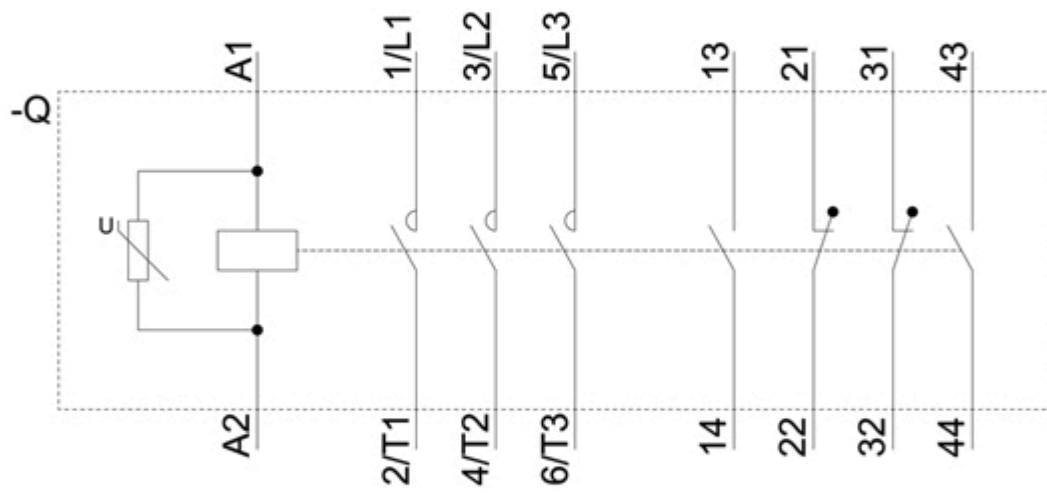

last modified:

12/18/2020 