SIEMENS

Data sheet 3VA9277-0HA20

motor operator 110-230V AC/110-250V DC accessory for: 3VA6 150/250 3VA5 250



Model	
product brand name	SENTRON
product designation	Accessories
Product version	Motorized operating mechanism (MO)
Voltage	
Type de tension pour la commande	AC/DC
 Rated control supply voltage Us at AC 50 Hz 	110 V
Rated control supply voltage Us at AC 50 Hz	230 V
Rated control supply voltage Us at AC 60 Hz	110 V
Rated control supply voltage Us at AC 60 Hz	230 V
Rated operational power	250 V·A
Mechanical Design	
Rated control supply voltage Us with DC	250 V
Height	75 mm
Width	105 mm
depth	132 mm
net weight	941 g
connectable conductor cross-section / solid	
• minimum	1.5 mm²
maximum	2.5 mm²
connectable conductor cross-section / finely stranded / with core end processing	
• minimum	1.5 mm²
• maximum	2.5 mm²
connectable conductor cross-section / stranded	
• minimum	1.5 mm²
maximum	2.5 mm²
ambient temperature / during operation	
• minimum	-25 °C
maximum	70 °C
ambient temperature / during storage	
• minimum	-40 +80
• maximum	
tightening torque	
• minimum	0.36 N·m
• maximum	0.44 N·m
Connections according IEC	

stripped length 7 mm

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9277-0HA20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA9277-0HA20

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9277-0HA20


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

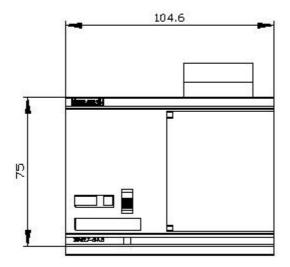

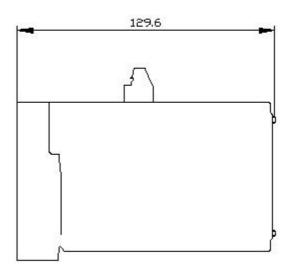

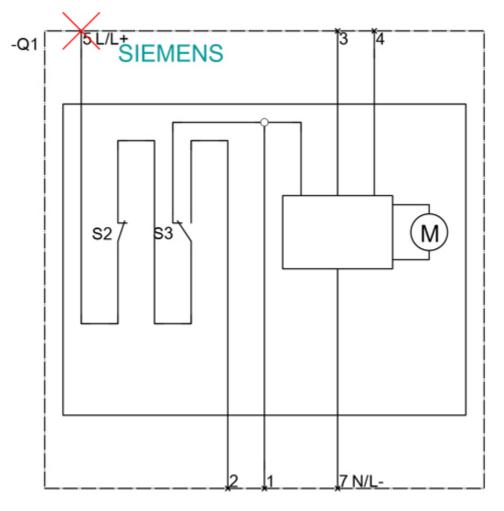

last modified: 4/29/2021 🖸