



power contactor, AC-3 95 A, 45 kW / 400 V 1 NO + 1 NC, 220 V AC, 50 Hz  
240 V/60 Hz 3-pole, 3 NO, Size S3 screw terminal

|  |                              |
|--|------------------------------|
| <b>product brand name</b>  | SIRIUS                       |
| <b>product designation</b>   | Power contactor              |
| <b>product type designation</b>  | 3RT2                         |
| <b>General technical data</b>  |                              |
| <b>size of contactor</b>   | S3                           |
| <b>product extension</b>   |                              |
| • function module for communication  | No                           |
| • auxiliary switch   | Yes                          |
| power loss [W] for rated value of the current at AC in hot operating state                       | 19.8 W                       |
| • per pole   | 6.6 W                        |
| <b>power loss [W] for rated value of the current without load current share typical</b>          | 22 W                         |
| <b>surge voltage resistance</b>  |                              |
| • of main circuit rated value  | 8 kV                         |
| • of auxiliary circuit rated value   | 6 kV                         |
| maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1 | 690 V                        |
| <b>shock resistance at rectangular impulse</b>   |                              |
| • at AC  | 6.7 g / 5 ms, 4.0 g / 10 ms  |
| <b>shock resistance with sine pulse</b>  |                              |
| • at AC  | 10.6 g / 5 ms, 6.3 g / 10 ms |
| <b>mechanical service life (switching cycles)</b>  |                              |
| • of contactor typical   | 10 000 000                   |
| • of the contactor with added electronically optimized auxiliary switch block typical            | 5 000 000                    |
| • of the contactor with added auxiliary switch block typical                                     | 10 000 000                   |
| <b>reference code acc. to IEC 81346-2</b>  | Q                            |
| Substance Prohibitance (Date)  | 01.03.2017 00:00:00          |
| <b>Ambient conditions</b>  |                              |
| installation altitude at height above sea level maximum  | 2 000 m                      |
| <b>ambient temperature</b>   |                              |
| • during operation   | -25 ... +60 °C               |
| • during storage   | -55 ... +80 °C               |
| <b>Main circuit</b>  |                              |
| <b>number of poles for main current circuit</b>  | 3                            |
| <b>number of NO contacts for main contacts</b>   | 3                            |
| operating voltage at AC-3 rated value maximum  | 1 000 V                      |

|   |                    |
|---|--------------------|
| <b>operational current</b>  |                    |
| <ul style="list-style-type: none"> <li>• at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>   | 130 A              |
| <ul style="list-style-type: none"> <li>• at AC-1 <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 40 °C rated value</li> </ul> </li> </ul> | 130 A              |
| <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 60 °C rated value</li> </ul>  | 110 A              |
| <ul style="list-style-type: none"> <li>— up to 1000 V at ambient temperature 40 °C rated value</li> </ul>   | 70 A               |
| <ul style="list-style-type: none"> <li>— up to 1000 V at ambient temperature 60 °C rated value</li> </ul>   | 60 A               |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>                                 | 95 A               |
| <ul style="list-style-type: none"> <li>— at 500 V rated value</li> </ul>  | 95 A               |
| <ul style="list-style-type: none"> <li>— at 690 V rated value</li> </ul>  | 78 A               |
| <ul style="list-style-type: none"> <li>— at 1000 V rated value</li> </ul>   | 30 A               |
| <ul style="list-style-type: none"> <li>• at AC-4 at 400 V rated value</li> </ul>  | 80 A               |
| <ul style="list-style-type: none"> <li>• at AC-5a up to 690 V rated value</li> </ul>  | 114 A              |
| <ul style="list-style-type: none"> <li>• at AC-5b up to 400 V rated value</li> </ul>  | 95 A               |
| <ul style="list-style-type: none"> <li>• at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=20 rated value</li> </ul> </li> </ul> | 84.4 A             |
| <ul style="list-style-type: none"> <li>— up to 400 V for current peak value n=20 rated value</li> </ul>   | 84.4 A             |
| <ul style="list-style-type: none"> <li>— up to 500 V for current peak value n=20 rated value</li> </ul>   | 84.4 A             |
| <ul style="list-style-type: none"> <li>— up to 690 V for current peak value n=20 rated value</li> </ul>   | 58 A               |
| <ul style="list-style-type: none"> <li>• at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=30 rated value</li> </ul> </li> </ul> | 56.3 A             |
| <ul style="list-style-type: none"> <li>— up to 400 V for current peak value n=30 rated value</li> </ul>   | 56.3 A             |
| <ul style="list-style-type: none"> <li>— up to 500 V for current peak value n=30 rated value</li> </ul>   | 56.3 A             |
| <ul style="list-style-type: none"> <li>— up to 690 V for current peak value n=30 rated value</li> </ul>   | 56.3 A             |
| minimum cross-section in main circuit at maximum AC-1 rated value   | 50 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b>  |                    |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>  | 42 A               |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>  | 30 A               |
| <b>operational current</b>  |                    |
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> </ul> </li> </ul>                | 100 A              |
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> </ul>  | 9 A                |
| <ul style="list-style-type: none"> <li>— at 220 V rated value</li> </ul>  | 2 A                |
| <ul style="list-style-type: none"> <li>— at 440 V rated value</li> </ul>  | 0.6 A              |
| <ul style="list-style-type: none"> <li>— at 600 V rated value</li> </ul>  | 0.4 A              |
| <ul style="list-style-type: none"> <li>• with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> </ul> </li> </ul>   | 100 A              |
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> </ul>  | 100 A              |
| <ul style="list-style-type: none"> <li>— at 220 V rated value</li> </ul>  | 10 A               |
| <ul style="list-style-type: none"> <li>— at 440 V rated value</li> </ul>  | 1.8 A              |
| <ul style="list-style-type: none"> <li>— at 600 V rated value</li> </ul>  | 1 A                |
| <ul style="list-style-type: none"> <li>• with 3 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> </ul> </li> </ul>   | 100 A              |
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> </ul>  | 100 A              |
| <ul style="list-style-type: none"> <li>— at 220 V rated value</li> </ul>  | 80 A               |
| <ul style="list-style-type: none"> <li>— at 440 V rated value</li> </ul>  | 4.5 A              |

|   |   |
|---|---|
| — at 600 V rated value  | 2.6 A   |
| <b>operational current</b>  |   |
| • at 1 current path at DC-3 at DC-5                                     |   |
| — at 24 V rated value   | 40 A  |
| — at 110 V rated value  | 2.5 A   |
| — at 220 V rated value  | 1 A   |
| — at 440 V rated value  | 0.15 A  |
| — at 600 V rated value  | 0.06 A  |
| • with 2 current paths in series at DC-3 at DC-5                        |   |
| — at 24 V rated value   | 100 A   |
| — at 110 V rated value  | 100 A   |
| — at 220 V rated value  | 7 A   |
| — at 440 V rated value  | 0.42 A  |
| — at 600 V rated value  | 0.16 A  |
| • with 3 current paths in series at DC-3 at DC-5                        |   |
| — at 24 V rated value   | 100 A   |
| — at 110 V rated value  | 100 A   |
| — at 220 V rated value  | 35 A  |
| — at 440 V rated value  | 0.8 A   |
| — at 600 V rated value  | 0.35 A  |
| <b>operating power</b>  |   |
| • at AC-2 at 400 V rated value  | 45 kW   |
| • at AC-3   |   |
| — at 230 V rated value  | 22 kW   |
| — at 400 V rated value  | 45 kW   |
| — at 500 V rated value  | 55 kW   |
| — at 690 V rated value  | 75 kW   |
| — at 1000 V rated value   | 37 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>      |   |
| • at 400 V rated value  | 22 kW   |
| • at 690 V rated value  | 27.4 kW   |
| <b>operating apparent power at AC-6a</b>                                |   |
| • up to 230 V for current peak value n=20 rated value                   | 33 kV·A   |
| • up to 400 V for current peak value n=20 rated value                   | 58 kV·A   |
| • up to 500 V for current peak value n=20 rated value                   | 73 kV·A   |
| • up to 690 V for current peak value n=20 rated value                   | 69 kV·A   |
| <b>operating apparent power at AC-6a</b>                                |   |
| • up to 230 V for current peak value n=30 rated value                   | 22.4 kV·A   |
| • up to 400 V for current peak value n=30 rated value                   | 39 kV·A   |
| • up to 500 V for current peak value n=30 rated value                   | 48.7 kV·A   |
| • up to 690 V for current peak value n=30 rated value                   | 67.3 kV·A   |
| <b>short-time withstand current in cold operating state up to 40 °C</b> |   |
| • limited to 1 s switching at zero current maximum                      | 1 725 A; Use minimum cross-section acc. to AC-1 rated value |
| • limited to 5 s switching at zero current maximum                      | 1 297 A; Use minimum cross-section acc. to AC-1 rated value |
| • limited to 10 s switching at zero current maximum                     | 946 A; Use minimum cross-section acc. to AC-1 rated value   |
| • limited to 30 s switching at zero current maximum                     | 610 A; Use minimum cross-section acc. to AC-1 rated value   |
| • limited to 60 s switching at zero current maximum                     | 486 A; Use minimum cross-section acc. to AC-1 rated value   |
| <b>no-load switching frequency</b>                                      |   |
| • at AC   | 5 000 1/h   |
| <b>operating frequency</b>  |   |
| • at AC-1 maximum   | 900 1/h   |
| • at AC-2 maximum   | 350 1/h   |
| • at AC-3 maximum   | 850 1/h   |
| • at AC-4 maximum   | 250 1/h   |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>                    | AC  |
| <b>control supply voltage at AC</b>                                     |   |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>  | 220 V<br>240 V                                       |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.8 ... 1.1<br>0.8 ... 1.1                           |
| <b>apparent pick-up power of magnet coil at AC</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 326 V·A<br>326 V·A                                   |
| <b>inductive power factor with closing power of the coil</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.62<br>0.55   |
| <b>apparent holding power of magnet coil at AC</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 22 V·A<br>22 V·A                                     |
| <b>inductive power factor with the holding power of the coil</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 0.36<br>0.4  |
| <b>closing delay</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 13 ... 50 ms   |
| <b>opening delay</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 10 ... 21 ms   |
| <b>arcing time</b>  | 10 ... 20 ms   |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2                                     |
| <b>Auxiliary circuit</b>  |  |
| number of NC contacts for auxiliary contacts instantaneous contact  | 1  |
| number of NO contacts for auxiliary contacts instantaneous contact  | 1  |
| operational current at AC-12 maximum  | 10 A   |
| <b>operational current at AC-15</b>   |  |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 6 A<br>3 A<br>2 A<br>1 A                             |
| <b>operational current at DC-12</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>6 A<br>6 A<br>3 A<br>2 A<br>1 A<br>0.15 A    |
| <b>operational current at DC-13</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.1 A |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)      |
| <b>UL/CSA ratings</b>   |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 96 A<br>77 A   |
| <b>yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor</li> </ul>   |  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>  | 10 hp<br>20 hp<br><br>30 hp<br>30 hp<br>75 hp<br>75 hp   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / P600  |
| <b>Short-circuit protection</b>   |  |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>  | gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)<br>gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)<br>gG: 10 A (500 V, 1 kA) |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface   |
| <b>fastening method</b> <ul style="list-style-type: none"> <li>• side-by-side mounting</li> </ul>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715<br>Yes  |
| <b>height</b>   | 140 mm   |
| <b>width</b>  | 70 mm  |
| <b>depth</b>  | 152 mm   |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 20 mm<br>10 mm<br>10 mm<br>0 mm<br><br>20 mm<br>10 mm<br>10 mm<br>10 mm<br><br>20 mm<br>10 mm<br>10 mm<br>10 mm  |
| <b>Connections/ Terminals</b>   |  |
| <b>type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>   | screw-type terminals<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main contacts</li> </ul>  | 2x (2.5 ... 35 mm²), 1x (2.5 ... 50 mm²)<br>2x (10 ... 1/0), 1x (10 ... 2)   |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> </ul>  | 2.5 ... 16 mm²<br>6 ... 70 mm²<br>2.5 ... 50 mm²   |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> </ul>   | 0.5 ... 2.5 mm²  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>  | 0.5 ... 2.5 mm <sup>2</sup>  |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for auxiliary contacts</li> </ul> | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14) |
| <b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"> <li>for main contacts</li> <li>for auxiliary contacts</li> </ul>  | 10 ... 2<br>20 ... 14  |



| Safety related data   |  |
|---|--|
| <b>product function mirror contact acc. to IEC 60947-4-1</b>  | Yes  |
| B10 value with high demand rate acc. to SN 31920  | 1 000 000  |
| <b>proportion of dangerous failures</b> <ul style="list-style-type: none"> <li>with low demand rate acc. to SN 31920</li> <li>with high demand rate acc. to SN 31920</li> </ul> | 40 %<br>73 %                                     |
| failure rate [FIT] with low demand rate acc. to SN 31920  | 100 FIT  |
| product function positively driven operation acc. to IEC 60947-5-1  | No   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>   | 20 y   |
| <b>protection class IP on the front acc. to IEC 60529</b>   | IP20   |
| <b>touch protection on the front acc. to IEC 60529</b>  | finger-safe, for vertical contact from the front |
| <b>suitability for use</b> <ul style="list-style-type: none"> <li>safety-related switching on</li> <li>safety-related switching OFF</li> </ul>                                  | Yes<br>Yes                                       |

| Certificates/ approvals  |     |
|--------------------------|-----|
| General Product Approval | EMC |



[KC](#)



| Functional Safety/Safety of Machinery        | Declaration of Conformity                    | Test Certificates   | Marine / Shipping  |
|--|--|---|--|
| <a href="#">Type Examination Certificate</a> | <a href="#">UK Declaration of Conformity</a> | <br>EG-Konf. | <a href="#">Special Test Certificate</a><br><a href="#">Type Test Certificates/Test Report</a><br><br>ABS |

| Marine / Shipping  | other  |
|--|--|
| <br>LRS | <a href="#">Confirmation</a><br><br>PRS |

| Railway |
|---------|
|---------|

[Vibration and Shock](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2046-1AP60>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2046-1AP60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AP60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2046-1AP60&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2046-1AP60&lang=en)

Characteristic: Tripping characteristics,  $I^2t$ , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AP60/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2046-1AP60&objecttype=14&gridview=view1>

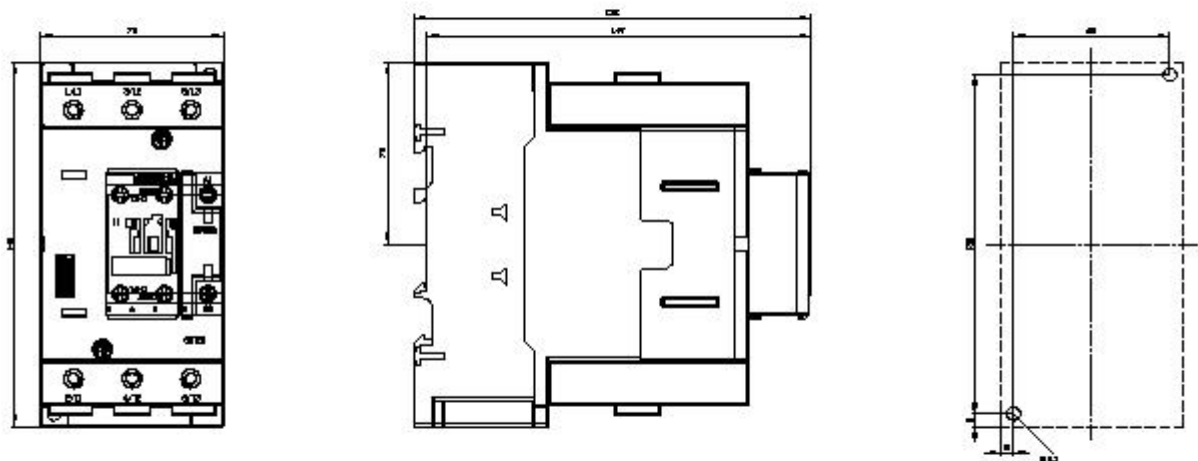



last modified:

3/26/2021 [🔗](#)