



Power contactor, AC-3 185 A, 90 kW / 400 V AC (50-60 Hz) / DC operation
200-220 V UC Auxiliary contacts 2 NO + 2 NC 3-pole, Size S6 Busbar
connections Drive: conventional screw terminal

| | |
|---|----------------------------|
| product brand name | SIRIUS |
| product designation | Power contactor |
| product type designation | 3RT1 |
| General technical data | |
| size of contactor | S6 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current at AC in hot operating state | 39 W |
| • per pole | 13 W |
| power loss [W] for rated value of the current without load current share typical | 5.2 W |
| surge voltage resistance | |
| • of main circuit rated value | 8 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1 | 690 V |
| shock resistance at rectangular impulse | |
| • at AC | 8,5g / 5 ms, 4,2g / 10 ms |
| • at DC | 8,5g / 5 ms, 4,2g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 13,4g / 5 ms, 6,5g / 10 ms |
| • at DC | 13,4g / 5 ms, 6,5g / 10 ms |
| mechanical service life (switching cycles) | |
| • of contactor typical | 10 000 000 |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000 |
| • of the contactor with added auxiliary switch block typical | 10 000 000 |
| reference code acc. to IEC 81346-2 | Q |
| Substance Prohibition (Date) | 01.05.2012 00:00:00 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C acc. to IEC 60068-2-30 | 95 % |

| | |
|---|--------------------|
| maximum | |
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| operating voltage at AC-3 rated value maximum | 1 000 V |
| operational current | |
| <ul style="list-style-type: none"> at AC-1 at 400 V at ambient temperature 40 °C rated value | 215 A |
| <ul style="list-style-type: none"> at AC-1 <ul style="list-style-type: none"> up to 690 V at ambient temperature 40 °C rated value | 215 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 690 V at ambient temperature 60 °C rated value | 185 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 1000 V at ambient temperature 40 °C rated value | 100 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 1000 V at ambient temperature 60 °C rated value | 100 A |
| <ul style="list-style-type: none"> at AC-3 <ul style="list-style-type: none"> at 400 V rated value | 185 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> at 500 V rated value | 185 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> at 690 V rated value | 170 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> at 1000 V rated value | 65 A |
| <ul style="list-style-type: none"> at AC-4 at 400 V rated value | 160 A |
| <ul style="list-style-type: none"> at AC-5a up to 690 V rated value | 189 A |
| <ul style="list-style-type: none"> at AC-5b up to 400 V rated value | 153 A |
| <ul style="list-style-type: none"> at AC-6a <ul style="list-style-type: none"> up to 230 V for current peak value n=20 rated value | 157 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 400 V for current peak value n=20 rated value | 157 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 500 V for current peak value n=20 rated value | 157 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 690 V for current peak value n=20 rated value | 157 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 1000 V for current peak value n=20 rated value | 65 A |
| <ul style="list-style-type: none"> at AC-6a <ul style="list-style-type: none"> up to 230 V for current peak value n=30 rated value | 105 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 400 V for current peak value n=30 rated value | 105 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 500 V for current peak value n=30 rated value | 105 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 690 V for current peak value n=30 rated value | 105 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> up to 1000 V for current peak value n=30 rated value | 65 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 95 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| <ul style="list-style-type: none"> at 400 V rated value | 81 A |
| <ul style="list-style-type: none"> at 690 V rated value | 65 A |
| operational current | |
| <ul style="list-style-type: none"> at 1 current path at DC-1 <ul style="list-style-type: none"> at 24 V rated value | 160 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> at 110 V rated value | 18 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> at 220 V rated value | 3.4 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> at 440 V rated value | 0.8 A |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> at 600 V rated value | 0.5 A |
| <ul style="list-style-type: none"> with 2 current paths in series at DC-1 <ul style="list-style-type: none"> at 24 V rated value | 160 A |

| | |
|---|---|
| <ul style="list-style-type: none"> — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | 160 A 20 A 3.2 A 1.6 A 160 A 160 A 160 A 11.5 A 4 A |
| operational current <ul style="list-style-type: none"> • at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | 160 A 2.5 A 0.6 A 0.17 A 0.12 A 160 A 160 A 2.5 A 0.65 A 0.37 A 160 A 160 A 160 A 1.4 A 0.75 A |
| operating power <ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value | 55 kW 90 kW 132 kW 160 kW 90 kW |
| operating power for approx. 200000 operating cycles at AC-4 <ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value | 45 kW 65 kW |
| operating apparent power at AC-6a <ul style="list-style-type: none"> • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 1000 V for current peak value n=20 rated value | 60 000 kV·A 100 000 V·A 130 000 V·A 180 000 V·A 110 000 V·A |
| operating apparent power at AC-6a <ul style="list-style-type: none"> • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 1000 V for current peak value n=30 rated value | 40 000 V·A 70 000 V·A 90 000 V·A 120 000 V·A 110 000 V·A |
| short-time withstand current in cold operating state up to 40 °C <ul style="list-style-type: none"> • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum | 2 900 A; Use minimum cross-section acc. to AC-1 rated value 2 084 A; Use minimum cross-section acc. to AC-1 rated value 1 480 A; Use minimum cross-section acc. to AC-1 rated value |

| | |
|--|--|
| <ul style="list-style-type: none"> • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum | 968 A; Use minimum cross-section acc. to AC-1 rated value 801 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | |
| <ul style="list-style-type: none"> • at AC • at DC | 2 000 1/h 2 000 1/h |
| operating frequency | |
| <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum | 800 1/h 300 1/h 750 1/h 130 1/h |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | 200 ... 220 V 200 ... 220 V |
| control supply voltage at DC | |
| <ul style="list-style-type: none"> • rated value | 200 ... 220 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| <ul style="list-style-type: none"> • initial value • full-scale value | 0.8 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.8 ... 1.1 0.8 ... 1.1 |
| design of the surge suppressor | with varistor |
| apparent pick-up power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 300 V·A 300 V·A |
| inductive power factor with closing power of the coil | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.9 0.9 |
| apparent holding power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 5.8 V·A 5.8 V·A |
| inductive power factor with the holding power of the coil | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.8 0.8 |
| closing power of magnet coil at DC | 360 W |
| holding power of magnet coil at DC | 5.2 W |
| closing delay | |
| <ul style="list-style-type: none"> • at AC • at DC | 20 ... 95 ms 20 ... 95 ms |
| opening delay | |
| <ul style="list-style-type: none"> • at AC • at DC | 40 ... 60 ms 40 ... 60 ms |
| arcing time | 10 ... 15 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts instantaneous contact | 2 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| <ul style="list-style-type: none"> • at 230 V rated value • at 400 V rated value • at 500 V rated value | 6 A 3 A 2 A |

| | |
|--|--|
| <ul style="list-style-type: none"> • at 690 V rated value | 1 A |
| operational current at DC-12 | |
| <ul style="list-style-type: none"> • at 24 V rated value | 10 A |
| <ul style="list-style-type: none"> • at 48 V rated value | 6 A |
| <ul style="list-style-type: none"> • at 60 V rated value | 6 A |
| <ul style="list-style-type: none"> • at 110 V rated value | 3 A |
| <ul style="list-style-type: none"> • at 125 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 220 V rated value | 1 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 0.15 A |
| operational current at DC-13 | |
| <ul style="list-style-type: none"> • at 24 V rated value | 10 A |
| <ul style="list-style-type: none"> • at 48 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 60 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 110 V rated value | 1 A |
| <ul style="list-style-type: none"> • at 125 V rated value | 0.9 A |
| <ul style="list-style-type: none"> • at 220 V rated value | 0.3 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value | 180 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 192 A |
| yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 230 V rated value | 30 hp |
| <ul style="list-style-type: none"> • for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value | 60 hp 75 hp 150 hp 200 hp |
| contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method | screw fixing |
| <ul style="list-style-type: none"> • side-by-side mounting | Yes |
| height | 172 mm |
| width | 120 mm |
| depth | 170 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards • for live parts | 20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm |

| | |
|---------------|-------|
| — forwards | 20 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 10 mm |

Connections/ Terminals

| | |
|--|--|
| width of connection bar | 17 mm |
| thickness of connection bar | 3 mm |
| diameter of holes | 9 mm |
| number of holes | 1 |
| type of electrical connection <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil | Connection bar screw-type terminals Screw-type terminals Screw-type terminals |
| type of connectable conductor cross-sections <ul style="list-style-type: none"> • at AWG cables for main contacts | 4 ... 250 kcmil |
| connectable conductor cross-section for main contacts <ul style="list-style-type: none"> • stranded | 25 ... 120 mm ² |
| connectable conductor cross-section for auxiliary contacts <ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing | 0.5 ... 4 mm ² 0.5 ... 2.5 mm ² |
| type of connectable conductor cross-sections <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — solid or stranded — finely stranded with core end processing • at AWG cables for auxiliary contacts | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²), max. 2x (0,75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12 |
| AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> • for auxiliary contacts | 18 ... 14 |

Safety related data

| | |
|---|--|
| product function mirror contact acc. to IEC 60947-4-1 | Yes |
| B10 value with high demand rate acc. to SN 31920 | 1 000 000 |
| product function positively driven operation acc. to IEC 60947-5-1 | No |
| protection class IP on the front acc. to IEC 60529 | IP00; IP20 with box terminal/cover |
| touch protection on the front acc. to IEC 60529 | finger-safe, for vertical contact from the front with box terminal/cover |
| suitability for use <ul style="list-style-type: none"> • safety-related switching OFF | Yes |

Certificates/ approvals

| | |
|---------------------------------|------------|
| General Product Approval | EMC |
|---------------------------------|------------|



KC



| | | |
|--|--------------------------|--------------------------|
| Functional Safety/Safety of Machinery | Test Certificates | Marine / Shipping |
|--|--------------------------|--------------------------|

[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



[Miscellaneous](#)[Confirmation](#)[Miscellaneous](#)[Confirmation](#)[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1056-6AM36>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1056-6AM36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1056-6AM36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1056-6AM36&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1056-6AM36/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1056-6AM36&objecttype=14&gridview=view1>

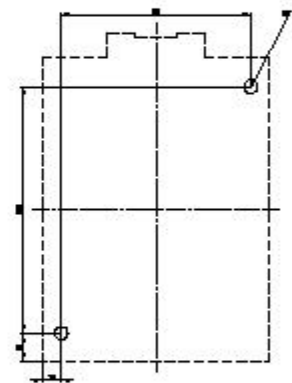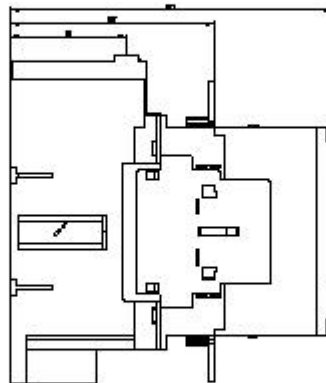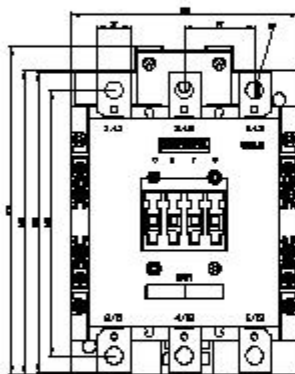

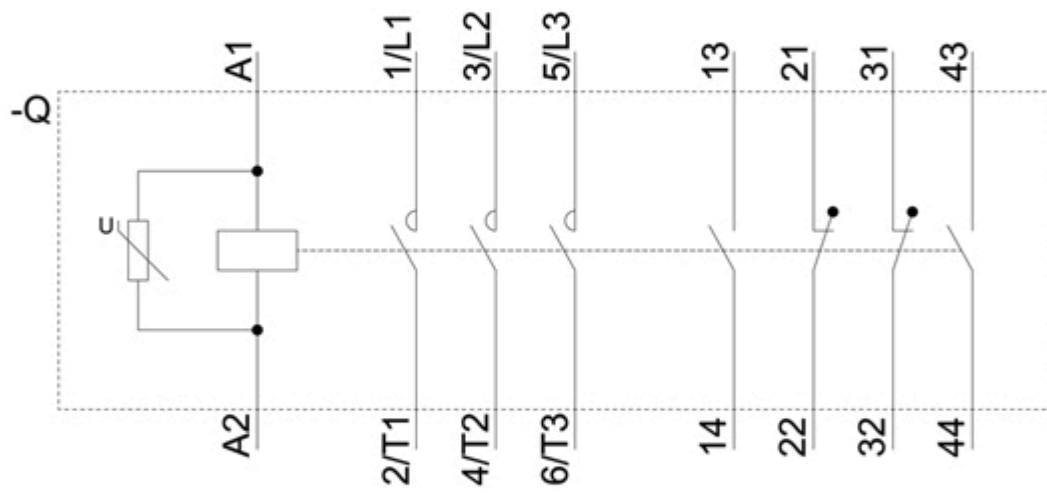

last modified:

7/22/2021 