## **SIEMENS**

Data sheet 3VA9978-0AA12



auxiliary switch changeover contacts type HQ (7mm) accessory for: 3VA4/5/6

Model	
product brand name	SENTRON
product designation	auxiliary switch
Product version	Accessories for 3VA circuit breakers
Accessories	Auxiliary switch
General technical data	
Degree of pollution	3
Overvoltage category	III
Voltage	
rated insulation voltage Ui	690 V
Tension assignée de tenue aux chocs	4 kV
operating voltage / at AC / acc. to CSA and UL	300 V
operating voltage / at DC / acc. to CSA and UL	250 V
Rated operational voltage Ue at AC 50 Hz	240 V
Rated operational voltage Ue with DC	250 V
Current	
Thermal current limit Ith	6 A
operational current	
• at AC-12 / at 12 V	6 A
• at AC-12 / at 24 V	6 A
• at AC-12 / at 48 V	6 A
• at AC-12 / at 125 V	6 A
• at AC-12 / at 220/240 V	6 A
• at DC-12 / at 12 V	6 A
• at DC-12 / at 24 V	4 A
• at DC-12 / at 48 V	2 A
• at DC-12 / at 110 V	0.5 A
• at DC-12 / at 250 V	0.25 A
• at DC-13 / at 12 V	1 A
• at DC-13 / at 24 V	0.8 A
• at DC-13 / at 48 V	0.4 A
• at DC-13 / at 110 V	0.2 A
• at DC-13 / at 250 V	0.1 A
• at AC-15 / at 12 V	3 A
• at AC-15 / at 24 V	3 A
• at AC-15 / at 48 V	3 A
<ul><li>at AC-15 / at 125 V</li></ul>	3 A

• at AC-15 / at 220/240 V	3 A	
Mechanical Design		
width / note	1 slot (7 mm)	
tightening torque / with screw-type terminals / minimum	0.4 N·m	
tightening torque / with screw-type terminals / maximum	0.5 N·m	
Connections according IEC		
stripped length	15 mm	
AWG number / as coded connectable conductor cross section / for auxiliary contacts		
• minimum	20	
• maximum	16	
Connetctions according UL		
stripped length [in]	0.6 in	
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in	
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in	
Further information		

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
<a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9978-0AA12">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9978-0AA12</a>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA9978-0AA12

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA9978-0AA12


**CAx-Online-Generator** 


http://www.siemens.com/cax

**Tender specifications** 

http://www.siemens.com/specifications

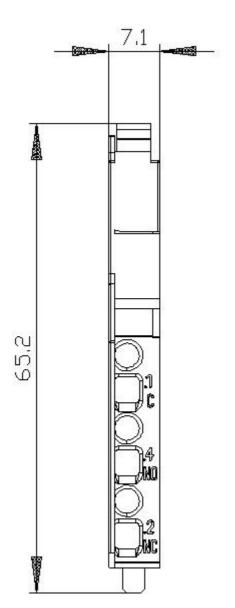

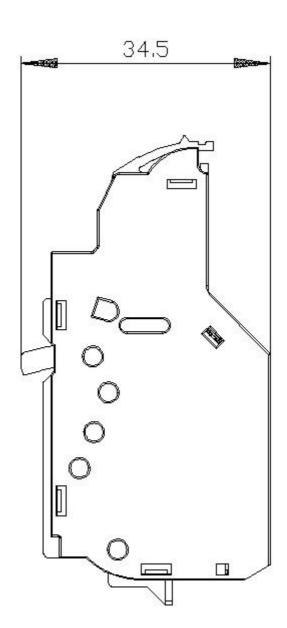

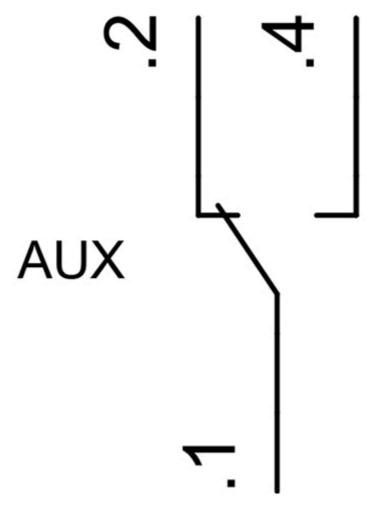

last modified:

12/20/2020 🖸