

Timing relay, Multifunction 2 change-over contacts, 27 functions 7 time ranges (0.05 s...100 h) 24 V AC/DC at 50/60 Hz AC with LED Spring-type terminal (push-in)



Product brand name	SIRIUS
Product designation	timing relay
Design of the product	27 functions
Product type designation	3RP25

General technical data	
Product component	
• Relay output	Yes
• semi-conductor output	No
Product extension required remote control	No
Product extension optional remote control	No
Insulation voltage	
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
Test voltage for isolation test	2.5 kV
Degree of pollution	3
Surge voltage resistance rated value	4 000 V
Protection class IP	IP20
Shock resistance	

• acc. to IEC 60068-2-27	11g / 15 ms
Vibration resistance	
• acc. to IEC 60068-2-6	10 ... 55 Hz / 0.35 mm
Mechanical service life (switching cycles)	
• typical	10 000 000
Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
Adjustable time	0.05 s ... 100 h
Relative setting accuracy relating to full-scale value	5 %
Thermal current	5 A
Minimum ON period	35 ms
Recovery time	150 ms
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	K
Reference code acc. to DIN EN 61346-2	K
Relative repeat accuracy	1 %

Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
Control supply voltage frequency 1	50 ... 60 Hz
Control supply voltage 1	
• at DC rated value	24 V
Operating range factor control supply voltage rated value at DC	
• initial value	0.85
• Full-scale value	1.1
Operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• Full-scale value	1.1
Operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
• Full-scale value	1.1
Inrush current peak	
• at 24 V	2 A
Duration of inrush current peak	
• at 24 V	1 ms

Switching Function

Switching function	
• ON-delay	Yes
• ON-delay/instantaneous contact	Yes
• passing make contact	Yes
• passing make contact/instantaneous contact	Yes
• OFF delay	No
Switching function	
• flashing symmetrically starting with interval/instantaneous	Yes
• flashing symmetrically starting with interval	Yes
• flashing symmetrically starting with pulse/instantaneous	Yes
• flashing symmetrically starting with pulse	Yes
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
Switching function	
• star-delta circuit with delay time	No
• star-delta circuit	Yes
Switching function with control signal	
• additive ON delay	Yes
• passing break contact	Yes
• passing break contact/instantaneous	Yes
• OFF delay	Yes
• OFF delay/instantaneous	Yes
• pulse delayed	Yes
• pulse delayed/instantaneous	Yes
• pulse-shaping	Yes
• pulse-shaping/instantaneous	Yes
• additive ON delay/instantaneous	Yes
• ON-delay/OFF-delay/instantaneous	Yes
• passing make contact	Yes
• passing make contact/instantaneous contact	Yes
Switching function of interval relay with control signal	
• retrotriggerable with deactivated control signal/instantaneous contact	Yes
• retrotriggerable with activated control signal	Yes
• retrotriggerable with activated control signal/instantaneous contact	Yes
• retriggerable with deactivated control signal	Yes
Design of the control terminal non-floating	Yes
Short-circuit protection	
Design of the fuse link	

- for short-circuit protection of the auxiliary switch required

fuse gL/gG: 4 A

Auxiliary circuit

Material of switching contacts	AgSnO ₂
Number of NC contacts	
• delayed switching	0
Number of NO contacts	
• delayed switching	0
Number of CO contacts	
• delayed switching	2
Operating current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 250 V	3 A
Operating current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
Operating frequency with 3RT2 contactor maximum	5 000 1/h
Contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
Contact rating of auxiliary contacts according to UL	R300 / B300
Influence of the surrounding temperature	1% in the whole temperature range to the set runtime
Power supply influence	1% in the whole voltage range to the set runtime
Switching capacity current with inductive load	0.01 ... 3 A

Inputs/ Outputs

Product function	
• at the relay outputs Switchover delayed/without delay	Yes
• non-volatile	No

Electromagnetic compatibility

EMI immunity	
• acc. to IEC 61812-1	EN 61000-6-2
Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV network connection / 1 kV control connection
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge

Safety related data

Protection against electrical shock	finger-safe
--	-------------

Type of insulation	Basic insulation
Category acc. to EN 954-1	none
Connections/ Terminals	
Product function <ul style="list-style-type: none"> removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection <ul style="list-style-type: none"> for auxiliary and control current circuit 	spring-loaded terminals (push-in)
Type of connectable conductor cross-sections <ul style="list-style-type: none"> solid finely stranded with core end processing finely stranded without core end processing at AWG conductors solid at AWG conductors stranded 	0.5 ... 4 mm ² 0.5 ... 2.5 mm ² 0.5 ... 4 mm ² 20 ... 12 20 ... 12
Connectable conductor cross-section <ul style="list-style-type: none"> solid finely stranded with core end processing finely stranded without core end processing 	0.5 ... 4 mm ² 0.5 ... 2.5 mm ² 0.5 ... 4 mm ²
AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> solid stranded 	20 ... 12 20 ... 12
Installation/ mounting/ dimensions	
Mounting position	any
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	100 mm
Width	22.5 mm
Depth	90 mm
Required spacing <ul style="list-style-type: none"> with side-by-side mounting <ul style="list-style-type: none"> forwards Backwards upwards downwards at the side for grounded parts <ul style="list-style-type: none"> forwards Backwards upwards at the side downwards 	0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm

- for live parts
 - forwards
 - Backwards
 - upwards
 - downwards
 - at the side

0 mm
0 mm
0 mm
0 mm
0 mm

Ambient conditions

Installation altitude at height above sea level

- maximum 2 000 m

Relative humidity

- during operation 10 ... 95 %

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity



CCC



CSA



UL



RCM



EG-Konf.

Declaration of Conformity

[Miscellaneous](#)

Test Certific- ates

[Type Test Certific-
ates/Test Report](#)

Marine / Shipping



BUREAU
VERITAS



LRS



PRS



RINA

Marine / Shipping

other

[Confirmation](#)



RMRS



DNVGL.COM/AF

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/ic10

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2505-2BB30>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2505-2BB30>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-2BB30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2505-2BB30&lang=en

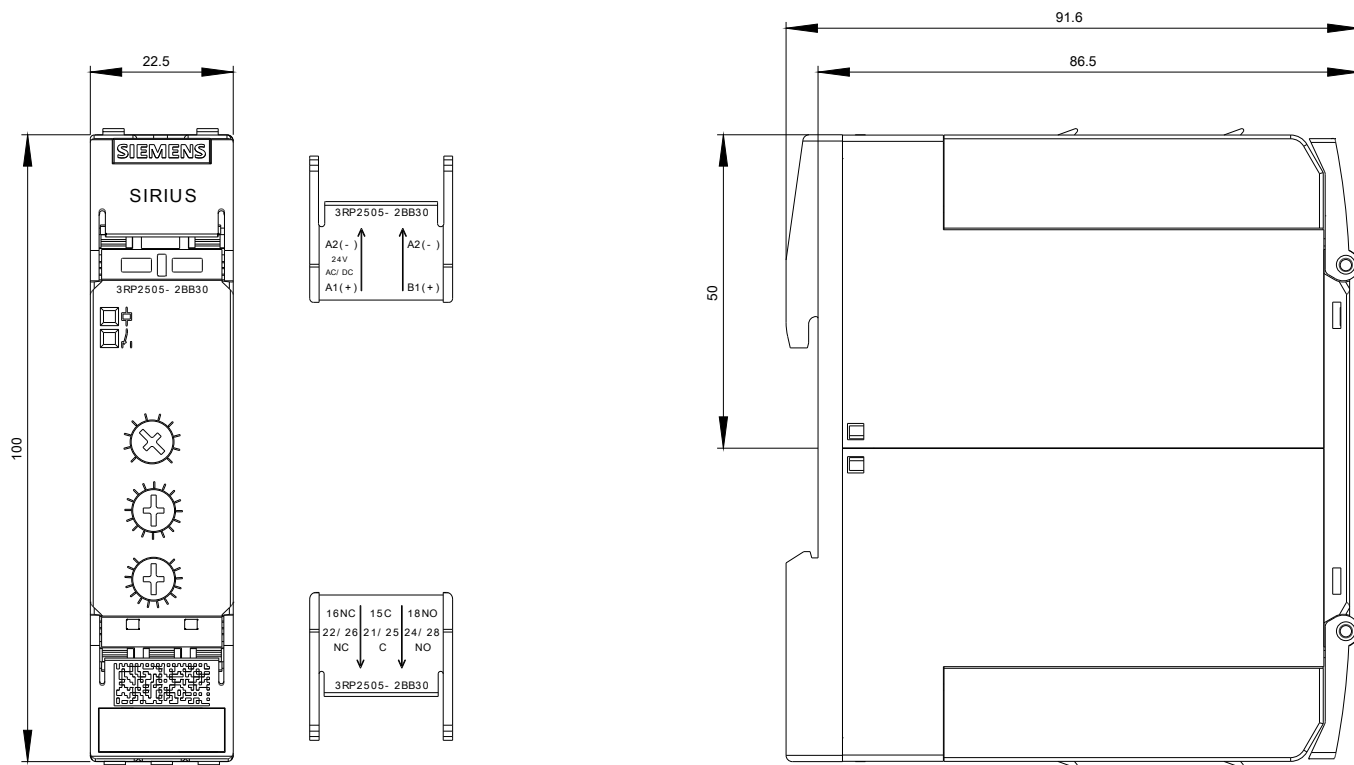

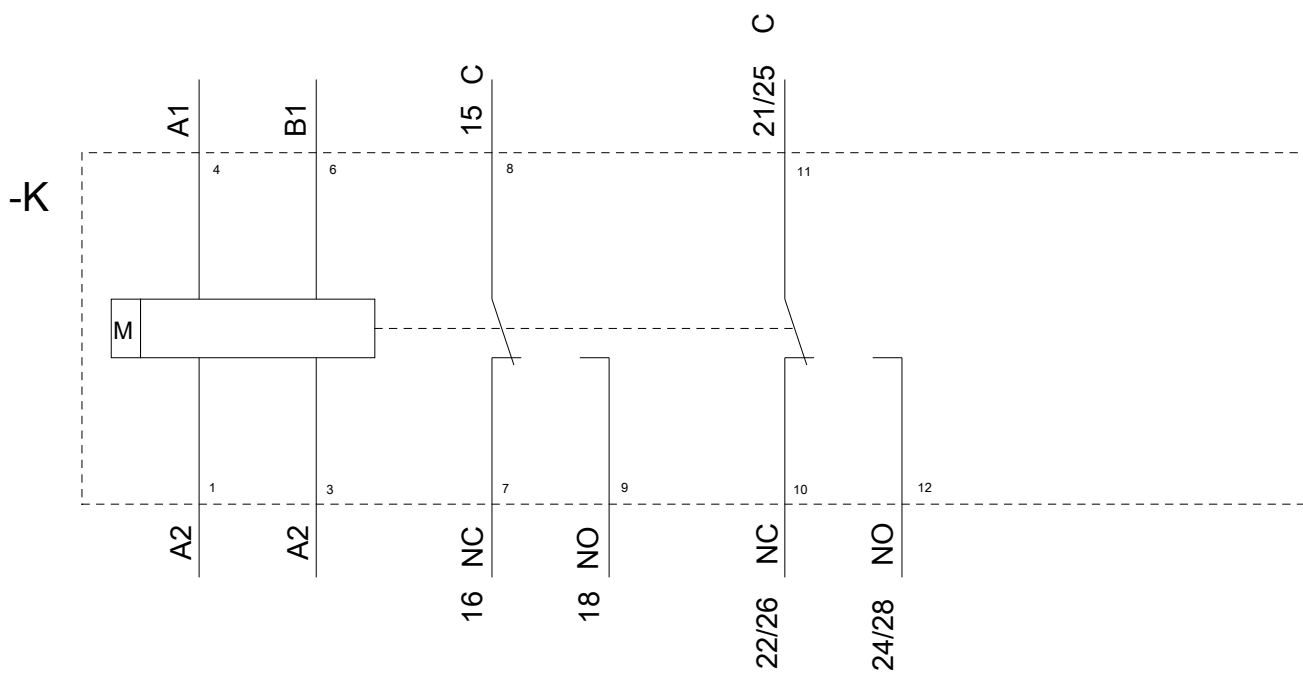

last modified:

12/16/2019