

MLFB-Ordering data

6SL3525-0PE21-5AA1



Figure similar

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
<b>Input</b>		<b>Power factor <math>\lambda</math></b>	0.95
Number of phases	3 AC	<b>Efficiency <math>\eta</math></b>	0.97
Line voltage	380 ... 500 V $\pm 10\%$	<b>Power loss</b>	0.06 kW
Line frequency	47 ... 63 Hz	<b>Ambient conditions</b>	
Rated current	3.80 A	<b>Cooling</b>	Convection
<b>Output</b>		<b>Cooling air requirement</b>	0.005 m <sup>3</sup> /s
Number of phases	3 AC	<b>Installation altitude</b>	1000 m
Rated voltage	400 V	<b>Ambient temperature</b>	
Rated power	1.50 kW	<b>Operation</b>	-10 ... 55 °C (14 ... 131 °F)
Rated current (IN)	4.10 A	<b>Transport</b>	-40 ... 70 °C (-40 ... 158 °F)
Max. output current	8.20 A	<b>Storage</b>	-40 ... 70 °C (-40 ... 158 °F)
Pulse frequency	4 kHz	<b>Relative humidity</b>	
Output frequency for vector control	0 ... 200 Hz	<b>Max. operation</b>	95 % at 40°C (104°F); RH, condensation not permitted
Output frequency for V/f control	0 ... 650 Hz		

In firmware V4.7 and higher, due to legal requirements, the maximum output frequency is restricted to 550 Hz.

### Overload capability

#### High Overload (HO)

Average max. rated output current during a cycle time of 300 s; 1.5 × rated output current (i.e. 150% overload) for 60 s with a cycle time of 300 s; 2 × rated output current (i.e. 200 % overload) for 3 s with a cycle time of 300 s

MLFB-Ordering data

6SL3525-0PE21-5AA1




Figure similar

### Mechanical data

Degree of protection	IP65 / UL type 3
Size	FSA
Net weight	5.70 kg
Width	445.0 mm
Height	210.0 mm
Depth	110.0 mm

### Converter losses to EN 50598-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-70.89 %

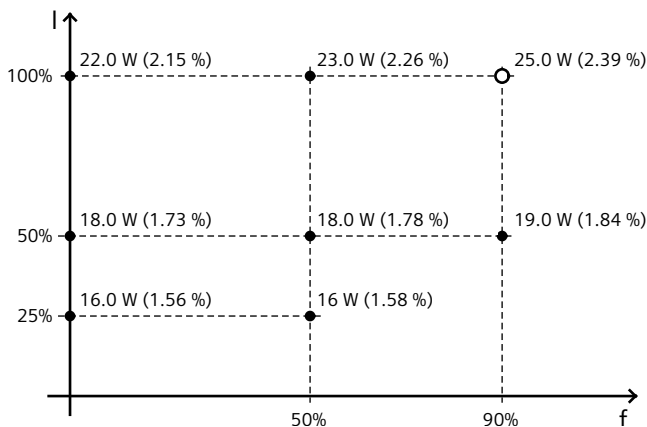

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

\*converted values

### Connections

#### Line side

Version	HAN Q4/2 (connector)
Conductor cross-section	1.50 ... 6.00 mm <sup>2</sup>

#### Motor end

Version	HAN Q8 (socket)
Conductor cross-section	1.00 ... 4.00 mm <sup>2</sup>
PE connection	On housing with M5 screw
Conductor cross-section	10.00 ... 16.00 mm <sup>2</sup>

#### Max. motor cable length

Shielded	15 m
Unshielded	30 m

### Standards

**Compliance with standards** UL 508C (UL list number E121068), CE, RCM

**CE marking** Low-voltage directive 2006/95/EC