

twist lever for position switch 3SE51 Metal lever Form A 27 mm long,
Step 9 mm with Stainless steel roller 19 mm



Product brand name	SIRIUS
Product designation	actuator for part-turn actuator
Product type designation	3SE5
Manufacturer's article number	
• of the supplied operating lever	3SE5000-0AA02

General technical data

Product function	
• positive opening	Yes
Shock resistance	
• acc. to IEC 60068-2-27	30 g / 11 ms
Vibration resistance	
• acc. to IEC 60068-2-6	0.35 mm/5g
Mechanical service life (switching cycles)	
• typical	15 000 000
Active principle	mechanical
Design of the interface for safety-related communication	without

Enclosure

Coating of the enclosure	Other types
---------------------------------	-------------

Drive Head	
Design of the operating mechanism	Twist lever, metal lever, 27 mm long, step 9 mm, high-grade steel roller 19 mm
Standard-compliant actuator head	EN 50041, design A
Shape of the switch head	roller
Outer diameter of the switch head	19 mm

Communication/ Protocol	
Design of the interface	without

Ambient conditions	
Ambient temperature	
• during operation	-25 ... +85 °C
• during storage	-40 ... +90 °C
Explosion protection category for dust	none

Installation/ mounting/ dimensions	
• (mounting position)	any
• (mounting type)	screw fixing

Certificates/approvals

General Product Approval	Test Certificates	other
 CSA  UR	Type Test Certificates/Test Report	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5000-0AA02>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5000-0AA02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5000-0AA02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5000-0AA02&lang=en

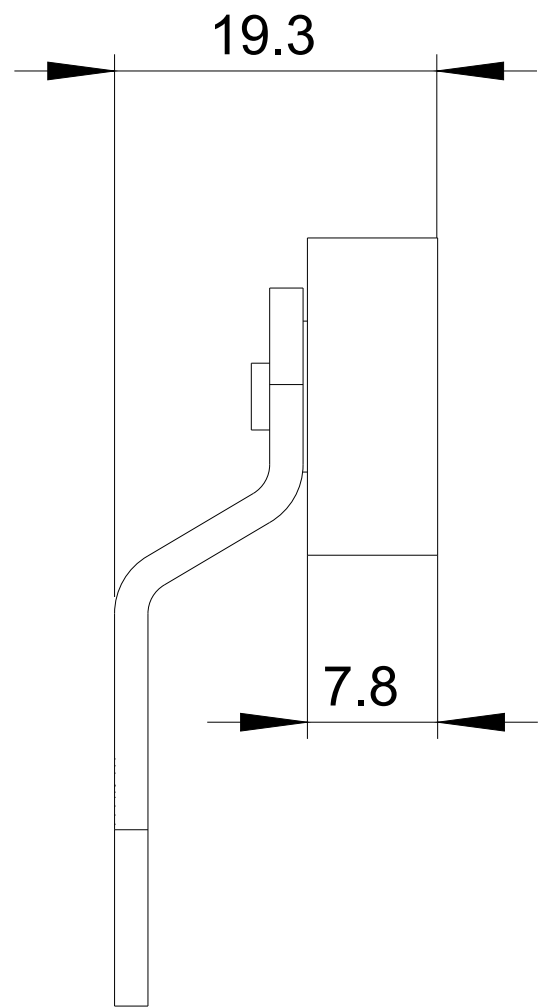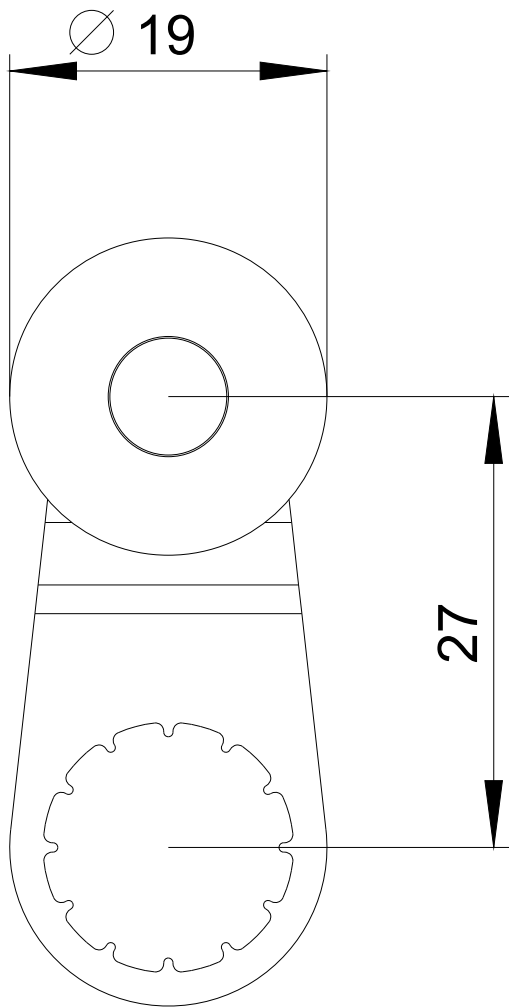

last modified:

04/29/2019