


Dk-Lok USA

161 West I-65 Service Road

Mobile, AL 36608

Phone: (251) 472-9580


Fax: (251) 450-0962 or (800) 287-8186

info@dklokusa.com

Item # V86B-F-8N-PK-S, V86 Series Ball Valves, VC86 Series CNG/NGV Ball Valves

Features

- High pressure up to 10 000 psi (689 bar).
- Blowout proof design with internally loaded stem.
- Handle indicates the flow direction.
- Positive stop with a robust stop pin.
- High flow rate with maximum orifice.
- Various end ports including DK-LOK tube port.
- Various flow control with side and bottom inletport on 3-way diverter valves.

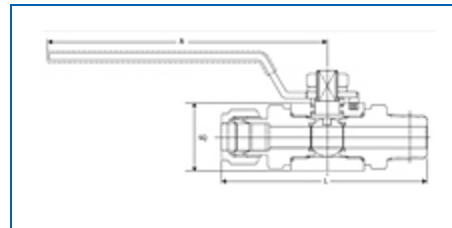

[Specifications](#) | [Dimensions](#)

Specifications

Directional Control	2-Way On-Off Valve
Valve Type	Standard Valve
Series	V86B
Body Material	Stainless Steel 316
End Connection	Female NPT
Size Inlet x Outlet	1/2" Female NPT x 1/2" Female NPT

Seat Material	PEEK
Panel Mounting	available
Locking Device	None
Handle	Lever Handle

Dimensions

Orifice	12.7 mm
Cv	10.1
A	149.0 mm
H	51.0 mm
L	89.0 mm
SQ	40.0 mm
Panel Hole Drill	38.0 mm
Panel Thickness (Max.)	4.0 mm