

Project:

Type:

Prepared By:

Date:



UPC: 019813833552



Features and Benefits

Direct Replacement for Fluorescent Lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W

Easy to install plug and play that requires no rewiring, no tools, no instructions

50,000 hour Lifespan

Rated for use in enclosed and open fixtures in dry or damp locations

Diffused frosted lens will maintain the same light quality over time

Compatible with most instant start electronic T8 ballasts, Please check Compatibility List

Approximately 40% more efficient than fluorescent T8 lamps

Instant on full brightness

Environmentally friendly, no mercury used

NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)

Compatible with RAB specified 0-10V dimming system

Technical Specifications

Performance

Product Type:

Linear

Input Wattage:

8W

Lumens (Nominal):

1200lm

Efficacy:

150 lm/W

Color Accuracy (CRI):

80 CRI

L70 Lifespan:

50,000 Hours

Dimming:

Compatible with RAB specified 0-10V dimming system. Dimming capabilities were tested and verified on IZT-2P16-TLED-SC/IZT-4P16-TLED-SC and Lutron DVSTV dimming system.

Construction

Material:

Coated Glass

Bulb Shape:

T8

Nominal Length:

3FT

Finish:

Frosted

Base Type:

G13

For Use Outdoors in Open Fixtures:

No

Beam Angle:

180°

Other

Equivalency:

25W Fluorescent

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

LED Characteristics

Color Temperature:

5000K Daylight

Technical Specifications (continued)

Electrical

Power Factor:

Ballast Dependent

Operating Temperature:

-20°C - 45°C

Input Voltage:

Ballast Dependent

Operating Frequency:

Ballast Dependent

Installation

Installation Type:

Type A, Plug and Play

Electrical Characteristics

Input Current @ 120V:

Ballast Dependent

Input Current @ 277V:

Ballast Dependent

Flicker:

Ballast Dependent

THD:

≤25%

Compliance

UL Listed:

Yes

NSF Listed:

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

DLC Model Number:

T10009

CEC Status:

Lawful for sale in California

Application:

Suitable for damp locations and totally enclosed fixtures.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLBP4GKVV59O


Ballast Performance

	0.78BF	0.88BF	1.88BF
Lumens	1000	1200	1600
System Power (W)	8.5	10.5	13.8

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	37.4	7.7	7.5
PALLET	750	51.2	40.6	43.3

Wiring Diagram

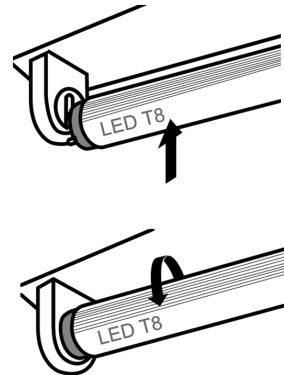

Dimension

