



TRAPEZOIDAL DECK HANGER, SPRING STEEL, 14 MM UNTHREADED HOLE

CATALOG NUMBER

TDH



CERTIFICATIONS



FEATURES


- Easy install
- If thread connection is required, use square nut THHM and snap in
- Use TDHP perforation tool to punch hole in decking

PRODUCT ATTRIBUTES

- Material: Spring Steel
- Finish: nVent CADDY Armour
- Hole Size 1: 6.8 mm
- Hole Size 2: 14 mm
- Hole Size 3: 10.5 mm
- D: 50 mm max

Ceiling Thickness	Static Load F
0,63 mm - 0,70 mm	600 N
0,71 mm - 0,80 mm	700 N
0,81 mm - 1,00 mm	800 N
1,01 mm - 1,20 mm	1000 N
1,21 mm - 1,50 mm	1200 N
> 1,50 mm	1500 N

DIAGRAMS

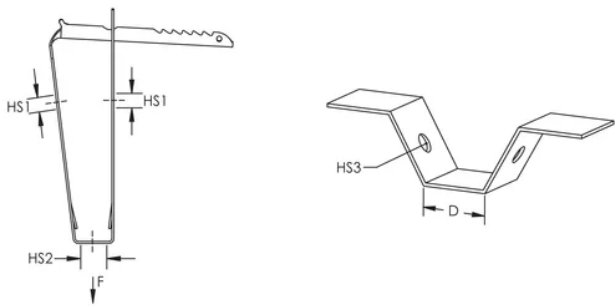

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500